



**Savannah**<sup>®</sup>

AGRO-FORESTRY SOLUTIONS

# Model 1207 **Rotary Scrub Rake**



**Savannah®**

AGRO-FORESTRY SOLUTIONS

## The Scrub Rake Revolution

The Savannah® Scrub Rake is the big one. It's virtually in a class of its own, with the weight, strength and durability to bring virgin country into production in double quick time. Built tough to take on the heaviest primary scrub clearing situations, the Savannah Scrub Rake is the perfect partner for Savannah® Stump Puller, Blade Plows, Shears, and Plows.

## One pass leaves the ground clear for tillage.

(7) Heavy duty, 5 ft. diameter pin wheels of the Scrub Rake's massive box section frame effectively clear a swath up to 18ft. The Model 1205 with (5) pin wheels clears up to 12ft.

Wide, piling trash into neat windrows, for burning off or removal. In a single sweep the Savannah Scrub Rake prepares the land for less robust tillage implements, protecting them from damage without the need for secondary raking.





AGRO-FORESTRY SOLUTIONS

**In the Savannah Equipment Tradition, the Scrub Rake is designed for maximum efficiency and minimum maintenance, even under the harshest conditions.**

**Tandem wheels:**

The outer trailing edge of the Scrub Rake is fitted with tandem wheels for extra stability and control. The wheels are offset, behind the final pin wheel, to keep them out of the trash during operation. The outrigger wheel Beam carries a concrete weight box for positive steering traction when clearing large volumes of scrub.

**Full hydraulic control for cab:**


Hydraulic lift and width functions are controlled from within the cab. Hydraulic steering on the rear wheels allows the

operator to vary the width of cut as required and steer the rake out to the side of the tractor on cleared ground. For transport the rake is steered into a trailing position, and with the pin wheels lifted a ground clearance of 9”.

**Extra strong pin wheels:**

The pin wheels are made from ¾”AR400 plate with 12” x 1.5 inch tapered fingers, and are fitted to jump arms with 60mm axles and twin tapered roller bearings in sealed hubs. The seven (7), 5ft pin wheels produce nearly triple the production of push rakes, and provide sufficient overlap to permit 4 inches of wear to the fingers before replacement is recommended.

With a Savannah Scrub Rake you can tackle the toughest clearing projects with complete confidence

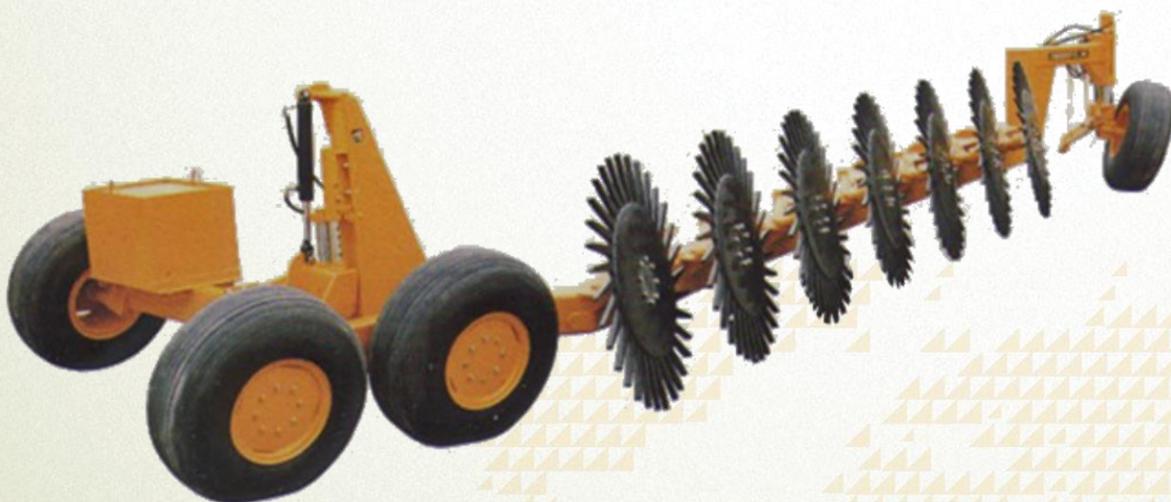



### FEATURES

- Full hydraulic lift and width control from the cab.
- Weighted axle beam assembly for greater steering traction. Total machine weight a solid 9 tons.
- Front hydraulic lift cylinder with adjustable drawbar link.
- Heavy duty pin wheels on jump arms with sealed hubs with double tapered roller bearings.
- (7) 5ft pin wheels are spec'd with Hardox 400.
- Pinwheel Teeth can be cut per customers specification.
- (3) 4" x 16" x 2.5" Hydraulic Cylinders for front and back lift cylinders and side steering width control cylinder.
- (4) 20 x 50 in. 36ply flotation tires with heavy duty wheel axle assemblies.
- (5) and (6) Pin wheel configurations available.
- Optional wheel coulter for added resistance to side loading.
- Weight: 18,000 lbs.
- Tractor Spec: >175 horsepower 4WD, 200, 250 and 300 horsepower class Dozers.





Savannah®

AGRO-FORESTRY SOLUTIONS





Savannah®

AGRO-FORESTRY SOLUTIONS





Savannah Global Solutions, LLC  
147 East Industrial Blvd  
Pembroke, GA 31321  
United States



[savannahglobal.com](http://savannahglobal.com)

DEALER INFORMATION

